


Flooring Specs

All Zena flooring comes unfinished for a sand-on-site install.

	Wide Rustic	Solid Character	Premium Oak
Thickness	3/4" tongue and groove	3/4" tongue and groove	3/4" tongue and groove
Construction	Engineered: 3/16" wear layer 15 mm baltic birch core	Solid	Solid
Widths	4.25", 5.25" and 6.25".	2.25" and 3.25"	2.25" and 3.25"
Lengths	8' maximum, 12" min. Primarily 6's and 8's with lots of 4's and 5's.	8'6" maximum, 12" min. Primarily 6's and 8's with lots of 4's and 5's.	8'6" maximum, 12" min. Primarily 6's and 8's with lots of 4's and 5's.
Grade	Includes sound knots, sapwood and a wide variety of colors and grain patterns.	Includes sound knots, sapwood and figure. Varying colors and grain patterns.	No knots larger than a pencil eraser, 10% or less sapwood, Rift and quartered grain only.
Species	Oregon White Oak, Bigleaf Maple, Oregon Ash	Oregon White Oak, Bigleaf Maple, Oregon Ash	Oregon White Oak

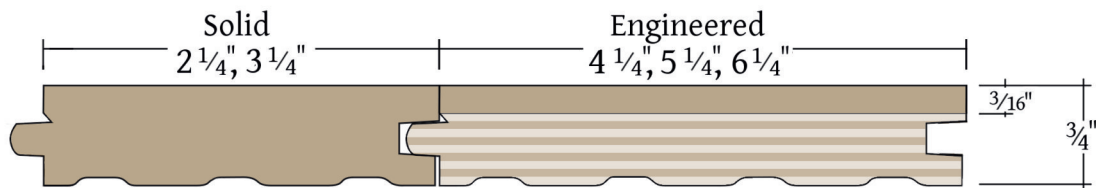

Species Specs

	Oregon White Oak	Oregon Ash	Western Bigleaf Maple
Density	High density - ideal for heavy traffic areas, dogs and commercial use. Janka rating: 1,660	Medium density - ideal for all but the heaviest use. Janka rating: 1,160	Low density - similar to Douglas Fir. Janka rating: 850
Typical Features	Bright streaks of sapwood, shiny ray flecks, swirling grain, large sound knots and occasional shimmering figure.	Light whites and grays mixed with brown marbling, broad looping grain and sound knots.	Significant color variation, including pinks, yellows, reds, whites and occasional greens. Knots more common but smaller than Oak. Lots of shimmering figure and some spalt.

